





LIGHTING PRODUCTS



Convergence of Innovation

Glitup is engaged in the manufacturing of LED lights and accessories, including LED drivers, housings, and various components. we have been committed to delivering reliable and high-quality lighting solutions under the brand name "GLITUP."

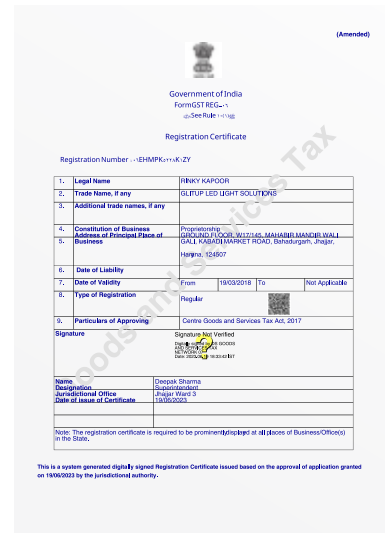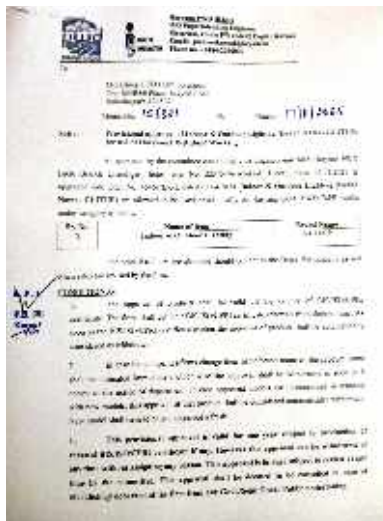

Over the years, Glitup has brought together multiple key disciplines - ranging from mould design and manufacturing to electronics production and large-scale assembly - to build our own high-performance lighting products. This end-to-end capability has helped us deliver innovative lighting solutions and consistently exceptional results for our partners. At Glitup, our deep understanding of lighting products enables us to craft unique, customised solutions for every requirement. Just as modern LED technology promotes sustainability, we ensure our lighting solutions strike the perfect balance between customer needs and environmental responsibility

Industrial & Outdoor Range



- High bay / UFO Light
- Well glass Light
- Flood Light
- Street Light
- Linear Light
- Canopy Light
- DOB Flood Light
- Oak Street Light
- 24V AC Flood Light
- Stadium Light
- PC Street Light
- Dolphin Street Light
- Lens Street Light
- Sensor UFO Light
- RGB Flood Light

*All pictures shown are for illustration purpose only, actual product may vary

*Customize specifications are acceptable, features/Specifications/Pictures are subject to change without any prior notice

*Not all products showcased in the catalogue may be available. Actual specifications may vary slightly from the description. Kindly contact Sales Team for stock information and delivery date.

High bay / UFO Light


G2



LED Type - 2835
Beam Angle - 70°
Optics Type - Spiral Lens

LHB-080-A	LHB-100-A	LHB-120-A	LHB-150-A	LHB-200-A	LHB-250-A
80W	100W	120W	150W	200W	250W
8800 lum	11000 lum	13200 lum	16500 lum	22000 lum	27500 lum
4KV Internal Surge Protection					


G2



LED Type - 5050
Beam Angle - 90°
Optics Type - Bubble Lens

LHB-080-B	LHB-100-B	LHB-120-B	LHB-150-B	LHB-200-B
80W	100W	120W	150W	200W
9600 lum	12000 lum	14400 lum	18000 lum	24000 lum
4KV Internal + 10KV Surge Protection				


G2



LED Type - 5050
Beam Angle - 70°
Optics Type - Spiral Lens

LHB-080-C	LHB-100-C	LHB-120-C	LHB-150-C	LHB-200-C	LHB-240-C
80W	100W	120W	150W	200W	240W
11600 lum	14500 lum	17400 lum	21750 lum	29000 lum	34800 lum
4KV Internal + 10KV Surge Protection					

G2



LED Type - 5050
Beam Angle - 90°
Optics Type - Bubble Lens

LHB-080-D	LHB-100-D	LHB-120-D	LHB-150-D	LHB-200-D
80W	100W	120W	150W	200W
9600 lum	12000 lum	14400 lum	18000 lum	24000 lum
4KV Internal + 10KV Surge Protection				

G1



Beam Angle - 70°
LED Type - 5050
Optics Type - Spiral

LHB-080-E	LHB-100-E	LHB-120-E	LHB-150-E	LHB-200-E	LHB-240-E
80W	100W	120W	150W	200W	240W
11600 lum	14500 lum	17400 lum	21750 lum	29000 lum	34800 lum
4KV Internal + 10KV Surge Protection					

G1



Beam Angle - 120°
Lens Type - Glass

LHB-080-F	LHB-100-F	LHB-120-F	LHB-150-F	LHB-200-F
80W	100W	120W	150W	200W
9200 lum	11500 lum	13800 lum	17250 lum	23000 lum
4KV Internal + 10KV Surge Protection				

Accessories



I-Bolt



Safety Rope



Well Glass Light

G2



G2



Beam Angle - 120°
Optics Type - Clear Dome
30W LWG-030-A
40W LWG-040-A
45W LWG-045-A

Beam Angle - 120°
Optics Type - Milky Dome
30W LWG-030-B
40W LWG-040-B
45W LWG-045-B

G1



G1



Beam Angle - 120°
Optics Type - Clear Dome
60W LWG-060-C
70W LWG-070-C
80W LWG-080-C

Beam Angle - 120°
Optics Type - Milky Dome
60W LWG-060-D
70W LWG-070-D
80W LWG-080-D

G1



Canopy Light



Beam Angle - 120°
Optics Type - Glass
60W LWG-060-E
70W LWG-070-E
80W LWG-080-E

Lens Type - Glass
80W LCL-080

Accessories



I-Bolt

SPD Cable



Flood Light

DOB Floodlights



Beam Angle - 36° / 46°

LFL-050-A	LFL-100-A	LFL-150-A	LFL-200-A
50W	100W	150W	200W
5000 lum	10000 lum	15000 lum	20000 lum
4KV Internal Surge Protection			

Optima Floodlight



Beam Angle - 120°

LFL-030-B	LFL-050-B	LFL-100-B	LFL-150-B	LFL-200-B	LFL-250-B
30W	50W	100W	150W	200W	250W
3200 lum	5200 lum	10500 lum	15750 lum	21000 lum	26250 lum
4KV Internal Surge Protection					

Optima Floodlight Lens



Beam Angle - 90°

LFL-100-C	LFL-150-C	LFL-200-C	LFL-250-C
100W	150W	200W	250W
10500 lum	15750 lum	21000 lum	26250 lum
4KV Internal Surge Protection			

Optima Floodlight Lens



Beam Angle - 90°

LFL-050-D	LFL-100-D	LFL-150-D	LFL-200-D	LFL-250-D
50W	100W	150W	200W	250W
6000 lum	12000 lum	18000 lum	24000 lum	30000 lum
4KV Internal Surge Protection + 10KV				

24V AC optima floodlight



Input Current - 2.08A / 4.16A

Input Voltage - 22-26VAC

50W LFL-050-E
100W LFL-100-E



Stadium Light

100W



LLL-100

Beam Angle - 20° / 60° / 90°
6KV Internal Surge Protection

200W



LLL-200

Beam Angle - 20° / 60° / 90°
6KV Internal Surge Protection

300W



LLL-300

Beam Angle - 20° / 60° / 90°
6KV Internal Surge Protection

400W



LLL-400

Beam Angle - 20° / 60° / 90°
6KV Internal Surge Protection

Accessories



SPD Cable



Street Light

Frame Streetlight



Beam Angle - 120°
4KV Internal Surge Protection

LSL-040-A	LSL-060-A	LSL-100-A	LSL-120-A	LSL-150-A	LSL-200-A	LSL-250-A
40W	60W	100W	120W	150W	200W	250W
43mm	46mm	54mm	60mm	60mm	64mm	64mm
4400 lum	6600 lum	11000 lum	13200 lum	16500 lum	22000 lum	27500 lum

Frame Streetlight



Type - II Lens
6KV Internal Surge Protection

L-040-B	LSL-060-B	LSL-100-B	LSL-120-B	LSL-150-B	LSL-200-B	LSL-250-B
40W	60W	100W	120W	150W	200W	250W
43mm	46mm	54mm	60mm	60mm	64mm	64mm
200 lum	6000 lum	10500 lum	12600 lum	15750 lum	21000 lum	26250 lum

Oak Streetlight



6KV Internal Surge Protection
Beam Angle - 120°

OSL-045-C	OSL-060-C	OSL-075-C	OSL-150-C
45W	60W	75W	150W
37mm	54mm	54mm	60mm
5600 Lum	7500 lum	9200 lum	18000 lum

Oak Lens Streetlight



6KV Internal Surge Protection
Beam Angle - 45° Type - II lens

OSL-045-D	OSL-060-D	OSL-075-D	OSL-150-D
45W	60W	75W	150W
37mm	54mm	54mm	60mm
5200 Lum	7000 lum	8400 lum	17300 lum

Optima



4KV Internal Surge Protection

OLSL-020-E	OLSL-040-E	OLSL-060-E
20W	40W	60W
40mm	43mm	46mm
2100 lum	4300 lum	6500 lum

Dolphin G2



LDL-045-F	LDL-045-G	LDL-060-F	LDL-060-G
45W	45W	60W	60W
5000 Lum	5000 Lum	6600 Lum	6600 Lum
-	LDR Sensor	-	LDR Sensor
4KV Internal Surge Protection			

Dolphin G1



Beam Angle - 45°-120° Type - II lens

LDL-025-H	LDL-045-H	LDL-080-H
25W	45W	80W
3000 lum	5200 lum	9300 lum
4KV Internal Surge Protection		

Accessories



SPD Cable



Street Light

ECO Streetlight



Asymmetric Lens
4KV Internal Surge Protection

ESL-024-I	ESL-036-I	ESL-050-I	ESL-060-I	ESL-090-I	ESL-120-I
24W	36W	50W	60W	90W	120W
2400 lum	3600 lum	5000 lum	6000 lum	9000 lum	12000 lum

Super Eco streetlight



Asymmetric Lens
4KV Internal Surge Protection

SESL-024-J	SESL-036-J	SESL-050-J	SESL-100-J
24W	36W	50W	100W
2400 lum	3600 lum	5000 lum	10000 lum

PC Streetlight



PC Cover
40mm Pole Dia


16W SLP-016-K



Special Projects

DAY LIGHT SENSOR

Streetlight equipped with day light sensor

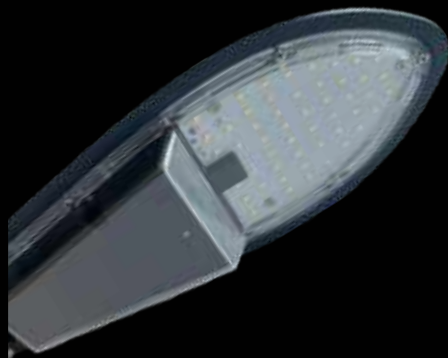

Day light sensor



Plug and play
no extra installation
required



4-10Kv Surge
In different models



5 lux -
25 lux



IP 66
Rated



In - Build
Sensor



Robust
Driver

Accessories





SPD Cable





SENSOR HIGHBAY

A Microwave Motions sensor highbay with day light function



Auto On Off
Dimmable



4-13m
Detection Range



3 Sec to
30 mins



5 lux -
300Lux



IP 65
Rated



0 Sec -
Infinity





Remote
controller

LHB-080-G	LHB-100-G	LHB-120-G	LHB-150-G	LHB-200-G	LHB-240-G
80W	100W	120W	150W	200W	240W
11600 lum	14500 lum	17400 lum	21750 lum	29000 lum	34800 lum

4KV Internal + 10KV Surge Protection


LED Type - 5050
Beam Angle - 70°
Optics Type - Spiral

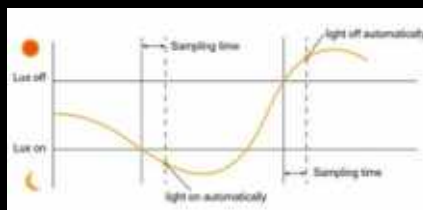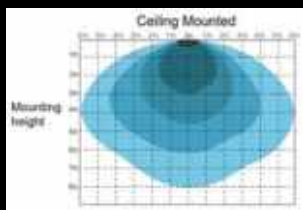

Accessories



I-Bolt



Safety Rope

Architectural Range



- COB light
- Downlight
- Surface light
- Pop out light
- Pullout light
- Wall lights
- Laser light
- Wall washer AI
- Profile Silicon
- Profile Multi
- light Track
- light Strip light
- Magnetic light
- Panel light

*All pictures shown are for illustration purpose only, actual product may vary

*Customize specifications are acceptable, features/Specifications/Pictures are subject to change without any prior notice

*Not all products showcased in the catalogue may be available. Actual specifications may vary slightly from the description. Kindly contact Sales Team for stock information and delivery date.



Canary Light



Wattages - 12W / 18W / 24W Color Temp - WW / NW / CW Beam Angle - 120° Cutout - 110mm / 138mm / 160mm Height - 50mm / 50mm / 50mm Body Color - White / Black Material - ADC12

Uni COB



Wattages - 7W / 12W / 18W Color Temp - WW / NW / CW Beam Angle - 36° Cutout - 55mm / 75mm / 95mm Height - 59mm / 85mm / 105mm Body Color - White / Black Finish -White / Matt Black / Gold Gun Black / Chrome

Blaze COB



Wattages - 7W / 12W / 18W Color Temp - WW / NW / CW Beam Angle - 36° Cutout - 55mm / 75mm / 85mm Height - 65mm / 75mm / 100mm Body Color - White / Black

Shimmer COB



Wattages - 4W / 7W / 12W Color Temp - WW / NW / CW Beam Angle - 36°/28° Cutout - 28mm / 35mm / 55mm Height - 28mm / 52mm / 63mm Body Color - White / Black / Grey Material - ADC12

Darrow COB



Wattages - 7W / 12W / 24W Color Temp - WW / NW / CW Beam Angle - 36° Cutout - 55mm / 75mm / 95mm Height - 78mm / 96mm / 121mm Body Color - White / Black Finish -White / Matt Black / Gold Gun Black / Chrome

Darrow Lite COB



Wattages - 7W / 12W / 18W Color Temp - WW / NW / CW Beam Angle - 36° Cutout - 55mm / 75mm / 85mm Height - 70mm / 85mm / 108mm Body Color - White / Black Finish -White / Matt Black / Gold Gun Black / Chrome

Darrow Slim COB



Wattages - 7W / 12W / 18W Color Temp - WW / NW / CW Beam Angle - 36° Cutout - 55mm / 75mm / 85mm Height - 59mm / 85mm / 105mm Body Color - White / Black Finish -White / Matt Black / Gold Gun Black / Chrome

Surface Pro COB



Wattages - 7W / 12W / 18W Color Temp - WW / NW / CW Beam Angle - 36° Cutout - N.A Height - 72mm / 82mm / 95mm Body Color - White / Black Finish -White / Matt Black / Gold Gun Black / Chrome

Surface R COB



Wattages - 7W / 12W / 18W Color Temp - WW / NW / CW Beam Angle - 36° Cutout - N.A Height - 70mm / 85mm / 100mm Body Color - White / Black Finish -White / Matt Black / Gold Shiny Black / Chrome / Rose gold

Spark COB



Wattages - 7W / 12W / 18W Color Temp - WW / NW / CW Beam Angle - 36° Cutout - 65mm / 80mm / 90mm Height - 65mm / 70mm / 100mm Body Color - Copper / Shiny black OD - 70mm / 85mm / 95mm

Delta COB



Wattages - 7W / 12W / 18W Color Temp - WW / NW / CW Beam Angle - 36° Cutout - 55mm / 75mm / 85mm Height - 65mm / 75mm / 100mm Body Color - White / Black Finish -White / Matt Black / Gold Shiny Black / Chrome / Rose Gold

Blaze Lens COB



Wattages - 7W / 12W / 18W Color Temp - WW / NW / CW Beam Angle - 36° Cutout - 55mm / 75mm / 85mm Height - 65mm / 70mm / 100mm Body Color - White / Black

Blaze Tilt COB



Wattages - 3W / 12W / 18W Color Temp - WW / NW / CW Beam Angle - 36°/45° Cutout - 55mm / 80mm / 100mm Height - 35mm / 40mm / 50mm Body Color - White / Black

Curvy COB



Wattages - 7W / 12W / 18W Color Temp - WW / NW / CW Beam Angle - 45° Cutout - 60mm / 75mm / 90mm Height - 60mm / 60mm / 65mm Body Color - White / Black Finish -White / Matt Black / Gold Shiny Black / Chrome / Rose Gold

Darrow Trimless COB



Wattages - 7W / 12W / 18W Color Temp - WW / NW / CW Beam Angle - 36° Cutout - 55mm / 75mm / 95mm Height - 78mm / 96mm / 121mm Body Color - White / Black Finish -White / Matt Black / Gold Gun Black / Chrome

Darrow SQ COB



Wattages - 7W / 12W / 18W Color Temp - WW / NW / CW Beam Angle - 36° Cutout - 55mm / 75mm / 95mm Height - 78mm / 96mm / 121mm Body Color - White / Black Finish -White / Matt Black / Gold Gun Black / Chrome

Darrow Tall COB



Wattages - 5W / 24W
 Color Temp - WW / NW / CW
 Beam Angle - 36°
 Cutout - 55mm / 85mm
 Height - 112mm / 145mm
 Body Color - White / Black
 Finish -White / Matt Black / Gold
 Gun Black / Chrome

Haze COB



Wattages - 7W / 12W / 18W
 Color Temp - WW / NW / CW
 Beam Angle - 36°
 Cutout - 35mm / 45mm / 55mm
 Height - 82mm / 106mm / 112mm
 Body Color - White / Black
 Finish -White / Matt Black / Gun Black

Fit COB



Wattages - 7W / 12W
 Color Temp - WW / NW / CW
 Beam Angle - 36°
 Cutout - 55mm / 75mm
 Height - 75mm / 81mm
 Body Color - White / Black
 Finish -White / Matt Black / Gold
 Gun Black / Chrome

Flare COB



Wattages - 12W
 Color Temp - WW / NW / CW
 Beam Angle - 36°
 Cutout - 75mm
 Height - 75mm
 Body Color - White / Black
 Finish -White / Matt Black / Gold
 Gun Black

Flare Multi COB



Wattages - 24W / 36W / 48W
 dimensions - 165X87mm
 245X87mm
 165X165mm

Laser Deep Light



Wattages - 6W / 12W / 18W
 Color Temp - WW / NW / CW
 Beam Angle - 45°
 Cutout- 65X25mm / 125X25mm
 95mmX95mm
 Body Color - White / Black

Laser Tilt Light



Wattages - 6W / 12W / 24W
 Color Temp - WW / NW / CW
 Beam Angle - 45°
 Cutout- 78X43mm / 136X43mm
 147X49mm
 Body Color - White / Black

Laser Focal Light



Wattages - 12W / 20W
 Color Temp - WW / NW / CW
 Beam Angle - 36°
 Cutout - 128X55mm / 205X50mm
 Body Color - White / Black

Laser Focal C Light



Wattages - 3W / 6W / 12W / 20W
 Color Temp - WW / NW / CW
 Beam Angle - 36°
 Cutout - 35X35mm / 58X35mm
 85X35mm / 137X35mm / 237X35mm
 Body Color - White / Black
 Finish -White / Black / Rose gold

Orca COB



Wattages - 7W / 12W
 Color Temp - WW / NW / CW
 Beam Angle - 36°
 Cutout - 55X55mm / 75X75mm
 Height - 52mm / 52mm
 Body Color - White / Black

Pin Spot COB



Wattages - 7W
 Color Temp - WW / NW / CW
 Beam Angle - 36°
 Dimensions - 38mm X 48mm X 75mm
 Body Color - White / Black

Pin Surface COB



Wattages - 7W
 Color Temp - WW
 Beam Angle - 36°
 Dimensions - 35mm X 120mm
 Body Color - Black / White

Swan COB



Wattages - 12W / 18W
 Color Temp - WW / NW / CW
 Beam Angle - 36°
 Cutout - 75mm / 95mm
 Body Color - White / Black

Swan Dual COB



Wattages - 14W / 24W
 Color Temp - WW / NW / CW
 Beam Angle - 36°
 Cutout - 126X65mm / 178X88mm
 Body Color - White / Black
 OD - 140X93mm / 194X104mm

Swan Dual SQ COB



Wattages - 24W
 Color Temp - WW / NW / CW
 Beam Angle - 36°
 Cutout - 155X80mm
 Body Color - White / Black
 OD - 165X90mm

Slit COB



Wattages - 8W / 12W
 Color Temp - WW / NW / CW
 Beam Angle - 30°
 Cutout - 65mm / 75mm
 Height - 55mm / 60mm
 Body Color - White / Black
 OD - 100mm / 130mm / 150mm

Multi Downlight



Wattages - 12W
 Color Temp - WW / NW / CW
 Beam Angle - 36°
 Cutout - 75mm
 Body Color - White
 Special - 12W COB +12W Downlight
 Alternate when switching
 on and off

Ellipse COB



Wattages - 7W / 12W / 18W
 Color Temp - WW / NW / CW
 Beam Angle - 36°
 Cutout - 55mm / 75mm / 85mm
 Height - 43mm / 44mm / 51mm
 Body Color - White / Black / Gold

Splash COB IP65



Wattages - 12W / 18W / 24W
 Color Temp - WW / NW / CW
 Protections - IP65
 Cutout- 75mmX95mmX115mm
 Height - 54mmX75mmX75mm
 Body Color - White / Black
 OD- 85mmX105mmX130mm

Kyoto COB



Wattages - 7W / 12W / 18W Color
 Temp - WW / NW / CW Beam
 Angle - 45° Cutout - 60mm /
 75mm / 88mm Height - 55mm /
 60mm / 65mm Body Color -
 White / Black Finish -White / Matt
 Black / Gold
 Shiny Black / Chrome

Kyoto Surface COB



Wattages - 7W / 12W / 18W
 Color Temp - WW / NW / CW
 Beam Angle - 45°
 Diameter - 55mm / 70mm / 85mm
 Height - 70mm / 90mm / 100mm
 Body Color - White / Black
 Finish -White / Matt Black / Gold
 Shiny Black / Chrome

Canary Shine



Wattages - 12W / 18W / 24W
 Color Temp - WW / NW / CW
 Beam Angle - 120°
 Cutout - 90mm / 120mm / 140mm
 Body Color - White / Black
 OD - 100mm / 130mm / 150mm
 Finish-White / Shiny Black / Rose gold

Pith AL Light



Wattages - 12W / 18W / 24W
 Color Temp - WW / NW / CW
 Beam Angle - 120°
 Diameter - 80mm / 90mm / 128mm
 Height - 46mm / 48mm / 50mm
 Body Color - White / Black
 Material - ADC12

Pith AL Tall Light



Wattages - 15W / 20W
 Color Temp - WW / NW / CW
 Beam Angle - 120°
 Diameter - 55mm / 85mm
 Height - 70mm / 72mm
 Body Color - White / Black
 Material - ADC12

Pith PC Light



Wattages - 12W / 18W
 Color Temp - WW / NW / CW
 Beam Angle - 120°
 Dimension- 130mm / 150mm
 Height - 35mm / 35mm
 Body Color - White

Zoom COB



Wattages - 12W / 18W / 30W
 Color Temp - WW / NW / CW
 Beam Angle - 36° / 60°
 Cutout - 75mm / 95mm / 115mm
 Height - 75mm / 95mm / 115mm
 Body Color - White
 OD - 90mm / 115mm / 135mm

Track Lens COB



Wattages - 20W / 30W
 Color Temp - WW / NW / CW
 Beam Angle - 24°
 Length - 145mm / 150mm
 Body Color - White / Black

Focus Wall Light



Wattages - 20W / 30W
 Color Temp - WW / NW / CW
 Beam Angle - 24°
 Dimension- 135mm / 160mm
 Length - 85mm
 Body Color - White / Black

Surface Panel



Wattages - 6W / 12W / 18W / 24W
 Color Temp - WW / NW / CW
 Beam Angle - 120°
 Dimensions - 120mm / 170mm
 225mm / 30mm
 Body Color - White

Slim Panel Light



Wattages - 9W / 15W / 20W
 Color Temp - WW / NW / CW
 Beam Angle - 120°
 Cutout - 100mm / 150mm / 200mm
 OD - 120mm / 165mm / 225mm
 Height - 14mm
 Material - ADC12

2X2 Panel Light



Wattages - 36W
 Color Temp - WW / NW / CW
 Beam Angle - 120°
 Dimension- 595mmX595mm
 Height - 32mm
 Body Color - White
 Material - MS

1X4 Panel Light



Wattages - 36W
 Color Temp - WW / NW / CW
 Beam Angle - 120°
 Dimension- 1195X295mm
 Height - 32mm
 Body Color - White

Up Down Light 1



Wattages - 14W / 24W
 Color Temp - WW / NW / CW
 Dimension- 52X160X82mm
 Body Color - Black / White / Grey
 Material - ADC12

Up Down Light 2



Wattages - 2W / 4W
 Color Temp - WW
 Protections - IP54
 Dimensions - 75mmX75mmX50mm
 Body Color - Black

Moss Footlight 1



Wattages - 3W / 6W
 Color Temp - WW
 Protections - IP54
 Dimensions - 85mmX85mmX65mm
 145mmX85mmX65mm
 Body Color - Black

Moss Footlight 2



Wattages - 8W
 Color Temp - WW
 Dimensions - 130mm Dia
 68mm depth
 Body Color - White / Black / Grey
 Material - ADC12

Moss Footlight 3



Wattages - 3W
 Color Temp - WW
 Protections - IP54
 Dimensions - 85mmX85mmX65mm
 145mmX85mmX65mm
 Body Color - Black / White

Up Down Light Multi



Type - 2+2 2 way / 3+3 2 Way Color
 Temp - WW Protections - IP54
 Dimensions - 140mmX85mmX40mm
 180mmX85mmX40mm
 Body Color - Black

Up down Light 3



Wattages - 3W / 6W
 Color Temp - WW
 Protections - IP54
 Dimensions - 80mmX80mmX65mm
 145mmX80mmX65mm
 Body Color - White / Black

Up down Light 4



Wattages - 10W
 Color Temp - WW / NW / CW
 Beam Angle - 120°
 Dimension- 120X92X28mm
 Body Color - Black / White / Grey
 Material - ADC12

LED Batten PC



(LX)
 Wattages - 7W / 12W / 20W
 Color Temp - WW / NW / CW
 Beam Angle - 120° Height -
 75mm / 95mm / 125mm Body
 Color - White / Black Operation
 mode - 80% dimming
 RangeofDetention - 8meter

Bulk Head PC



EMERGENCY USE
 Wattages - 12W
 Color Temp - WW / NW / CW
 Beam Angle - 120°
 Dimensions - 183mmX122mmX85mm
 183mmX90mm
 Body Color - White

Wall Washer



Wattages - 18W / 36W / 48W / 72W
 Length - 0.5M / 1M / 1.2M / 1M
 Protections - IP65
 Beam Angle - 15° / 30°
 Dimensions - 50mmX60mm
 Body Color - Silver

Spike COB



Wattages - 4W / 7W / 12W
 Color Temp - WW
 Beam Angle - 54°
 Protections - IP65
 Body Color - Black

Staircase Step controller



Input Voltage - 12V / 24V
 Max Load - 12V - 15W / Step (300W)
 24V -20W / Step (400W)
 No of steps - 32
 Sensor type - PIR motion (2Pcs)
 Sensing distance - 0.1 - 2 Meters
 Size - 185X78X25MM
 Features - Speed / step control / IC*
IC Note* - 12V - 150W / running strip
 24V - 200W / running strip

Sensors AC



Operation Mode - On / Off
 Current Rating - 7A 1.5 KVA
 Holding Time - 8s - 100s
 Detection Range - 8 Meter

Moss Burial Light




Wattages - 3W / 6W
 Color Temp - WW
 Beam Angle - 30°
 Cutout - 95mm / 115mm
 Diameter - 100mm / 120mm
 Height - 90mm / 90mm

Smart control




Silicon Profile

Silicon Profile Accessories

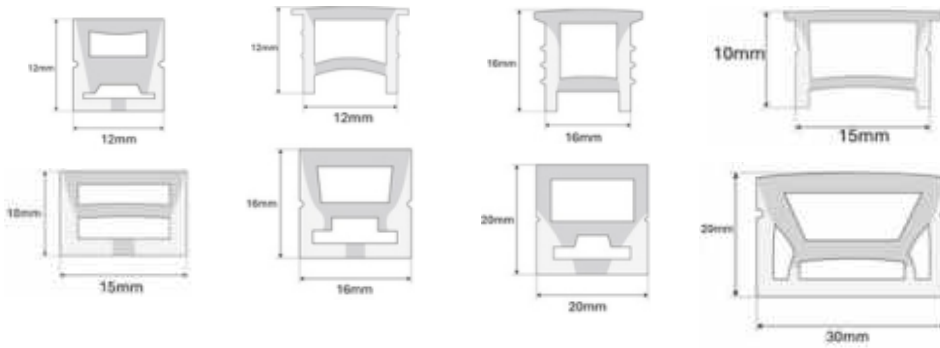

Aluminum Profile

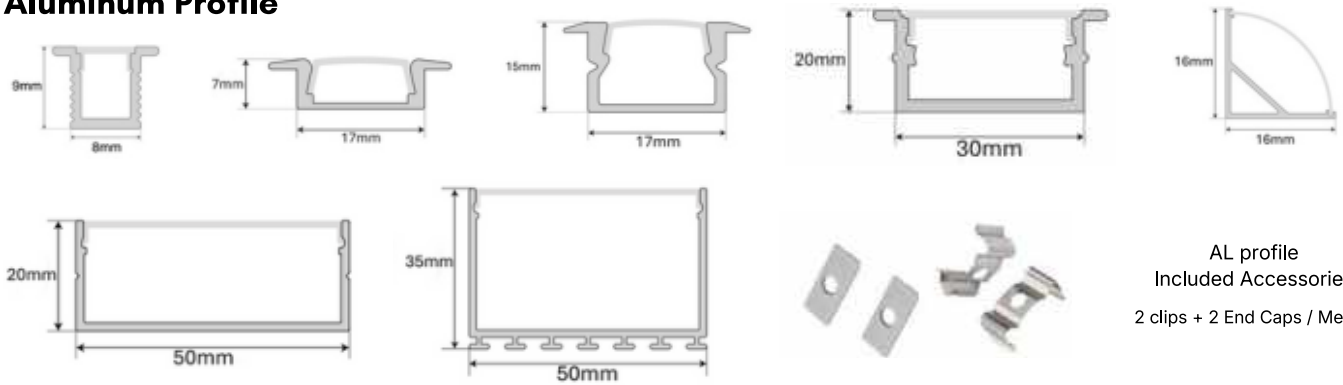

AL profile
Included Accessories
2 clips + 2 End Caps / Meter

Strip Light



IP Strip

LED/Meter - 120 / 180 / 240 - 2835LED
Wattage Per Meter - 8W / 14W / 18W
CCT - WW / NW / CW
Width - 120LED/Meter - 5mm/8mm
180LED/Meter - 5mm/10mm
240LED/Meter - 10mm
Protections - IP65 in 120LED/Meter
Input Voltage - 12V / 24V
Dual CCT in 180 LED/Meter

Rope light



LED/meter - 120LED/Meter
CCT - WW 2835LED
Width - 10mm
Input Voltage - 220V AC

Running strip



LED/Meter - 126LED/Meter
CCT - NW / WW2835LED
Width - 8mm

SMPS



Input Voltage - 12V DC

current Power	Dimensions(mm)
2.5A 30W	90X40X22
5A 60W	114X50X22
10A 120W	138X50X22
12.5A 150W	178X50X22
25A 300W	205X50X22

Isolated
2Years Warrantty

Input Voltage - 24V DC

current Power	Dimensions(mm)
2.5A 60W	114X50X22
5A 120W	138X50X22
10A 240W	205X50X22
12.5A 300W	205X50X22
16.5A 400W	238X50X22

Isolated
2Years Warrantty

Ultra Slim Magnetic Track



Magnetic Track





LED LIGHT PRODUCTS

GLITUP LED LIGHT SOLUTIONS

GLITUP Ground Floor, W17/145 Mahabir Mandir Wali Gali,
Sayeed Road, Bahadurgarh, Haryana-124507
for more information Call: 9729661223

🌐 www.ledlightwale.com
✉ glituplight@gmail.com